


CAT.6 Plug STP(For Strand Cable-2 Prong)

Patented

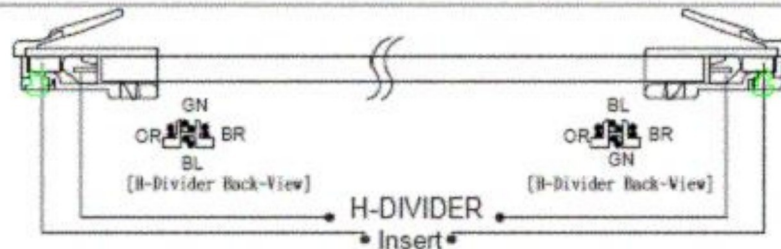

Performance:

Meets Cat.6 EIA/TIA 568B.2-1 Hard-Ware Standard.

SGS Report :

Standard Pb / Sb / As / Ba / Cd / Cr / Hg / Se (EN-71 & BS 5665)

Plug Dimensions: Fit F.C.C. / IEC Standard

Insert :

For OD 0.85~1.05mm PVC Wire .

Materials:


Housing : Fireproof PC UL-94-V2
 Metallic Cover : Brass & Nickel plating.
 Contact Blade : Phosphor Bronze
 Contact Plating : 50 micro inches Gold plating.
 Insert : Fireproof PC UL-94-V2
 Divider : Fireproof PC UL-94-V2
 Blue Tool : Fireproof PC UL-94-V2

Electrical Specifications:

Insulation Resistance : 500M ohms (min.)
 Contact Resistance : 20m ohms (max.)
 DC Resistance : 0.1 ohm (max.)
 Current Rating : 30VAC/40VDC at 1.5 Amps .
 Withstanding Voltage : 1000 VAC RMS @ 60Hz / 1 min.

Mechanical Specifications:

Plug Tensile : 18 lb.(min)
 Insertion Cycle : 2000 Cycles (min.)
 Operation Temperature : -40 ~ +70 degree / C

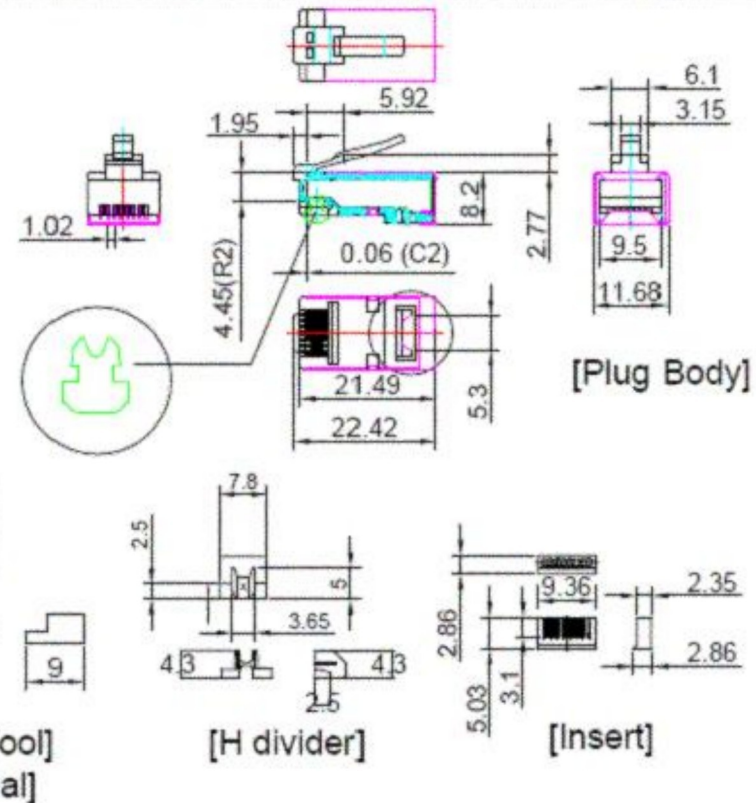

DRAW NO:		ITEM NO:	6PG-HS12X
UNIT	APPR	CUSTOMER:	
m/m	CHECK	DATE:	
Scale:	DESIGN	TOLERANCE:	· ± 1 · X ± 0.2 · XX ± 0.15